



Combined Passive Fire Protection and Thermal Insulation for High-Temperature Applications

Pyrogel® XTF aerogel blanket insulation is designed to provide exceptional passive fire protection and superior thermal performance in a thin, lightweight format.

Tested to the most stringent fire-protection standards, Pyrogel XTF delivers hydrocarbon pool-fire protection for up to 4 hours, and jet fire protection up to 2 hours. It can also be used to meet the requirements of API 521 for the sizing of pressure relief systems.


Pyrogel XTF incorporates all the insulative qualities of Pyrogel XTE to combine class-leading thermal performance with versatile passive fire protection. Hydrophobic and breathable, Pyrogel XTF keeps underlying assets drier for longer, providing superior corrosion defense and maintaining process conditions in the harshest of environments.

Offering more asset coverage per man hour, especially on large-bore piping, vessels, and skirts, Pyrogel XTF supports a faster return to service. It can be applied in all weather conditions and requires no cure time, providing immediate protection of assets.

THERMAL CONDUCTIVITY†

Tested in accordance with ASTM C177

Mean Temp. °F / °C	k BTU-in/hr-ft ² -°F / mW/m-K
32 / 0	0.14 / 20
212 / 100	0.16 / 23
392 / 200	0.19 / 28
572 / 300	0.24 / 35
752 / 400	0.32 / 46
932 / 500	0.44 / 64
1112 / 600	0.62 / 89

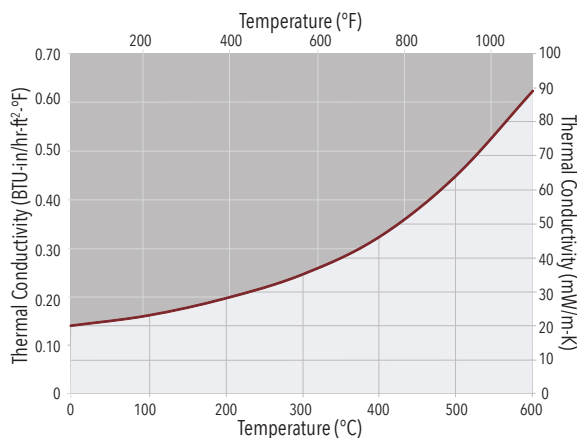

†Thermal conductivity measured at a compressive load of 2 psi.

ADVANTAGES

- **Lower total installed cost compared to traditional passive fire protections**
- **Faster and easier application gives immediate passive fire protection—no curing or drying time needed**
- **Can be installed in all weather conditions**
- **Easily removed and reused after inspection**
- **Hydrophobic and breathable; resists liquid water and the damaging effects of CUI/CUF**
- **Lightweight, durable design allows for pre-insulation**
- **Suitable for applications from ambient to 650°C/1200°F**

PHYSICAL PROPERTIES

THICKNESS*	0.4 in (10 mm)
MATERIAL FORM*	850 sqft roll
MAX. USE TEMP.	650°C (1200°F)
COLOR	Grey
DENSITY*	12.5 lb/ft ³ (0.20 g/cc)
HYDROPHOBIC	Yes

*Nominal Values

PERFORMANCE PROPERTIES OF PYROGEL XTF INSULATION BLANKET

TEST PROCEDURE	PROPERTY	RESULTS
ASTM C165 ¹	Compressive Resistance	≥ 3 psi (20.7 kPa) @ 10% deformation
ASTM C411	Hot Surface Performance	Pass ²
ASTM C447	Estimation of Maximum Use Temperature	650°C (1200°F)
ASTM C795	Insulation for Use Over Austenitic Stainless Steel	Pass
ASTM C1101/1101M	Flexibility of Blanket Insulation	Flexible
ASTM C1104/1104M	Water Vapor Sorption	≤ 5% (by weight)
ASTM C1338	Fungal Resistance of Insulation Materials	No Growth
ASTM C1617	Corrosiveness to Steel	Pass ²
ASTM C1763	Water Absorption by Immersion	Pass ²
ASTM E84	Surface Burning Characteristics	Flame Spread Index ≤ 5 Smoke Developed Index ≤ 10

[1] Compression resistance measured using a preload of 2 psi.

[2] Passes criteria established in ASTM C1728

SYSTEM PERFORMANCE OF PYROGEL XTF

Pyrogel XTF's performance in acoustic service and fire protection applications has been evaluated according to the following test methods. Contact Aspen Aerogels technical service for configuration details.

- UL 1709 - Rapid Rise Fire Test: Up to 240 min of protection
- OTI-95-634 - Jet Fire Protection: Up to 120 min of protection
- ISO 15665 - Acoustic Insulation for Pipes, Valves, and Flanges: Configurations meeting Class A2, B2, and C2 are possible

THE AEROGEL ADVANTAGE

Aerogel is a lightweight solid derived from gel in which the liquid component of the gel has been replaced with air. The process of creating aerogel results in a material with extremely low density and the lowest thermal conductivity of any solid. These remarkable properties make aerogel one of the world's most efficient insulating materials. Our patented process integrates this unique aerogel into a fiber-batting to create flexible, resilient, and durable aerogel blankets with superior insulating performance.

WORKING WITH PYROGEL®

Clean, flush, and accurate cutting of Pyrogel can be achieved using conventional cutting tools such as scissors, tin snips, or razor knives. As with all technical insulation materials, appropriate personal protective equipment (PPE) should be worn when handling, cutting and installing Pyrogel. See SDS/AIS for complete health and safety information. Pyrogel XTF is designed for use with a properly installed jacketing system. Refer to the Pyrogel XTF Installation Guide for details.

TECHNICAL SERVICES

Pyrogel XTF represents the state of the art in passive fire protection, minimizing total installed costs while facilitating long-term operating cost savings. To ensure a successful project, our Technical Services team offers comprehensive assistance, from initial design and specification, through to training, and site start up.

MORE INFO



PRODUCT WEB PAGE

Scan with mobile device or go to aerogel.com/pyrogel

This product, produced by Aspen Aerogels, Inc. ("ASPEN") is covered by a series of domestic and international patents and licenses. See www.aerogel.com/pat for further details. The information in this datasheet is provided as a convenience and for informational purposes only and obtained from initial type testing by the manufacturer. Product properties are subject to manufacturing variations. This information may contain inaccuracies, errors or omissions. All the products supplied, including all recommendations or suggestions must be evaluated by the user to determine applicability and suitability for any particular use. No guarantee or warranty as to this information, or any product to which it relates, is given or implied here. ASPEN DISCLAIMS ALL WARRANTIES EXPRESSED OR IMPLIED, INCLUDING MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE AS TO (i) SUCH INFORMATION, (ii) ANY PRODUCT. In no event is ASPEN responsible for, and ASPEN does not accept and hereby disclaims liability for, any damages whatsoever in connection with the use of or reliance on this information or any product to which it relates.

